


Air Cob Series

Series	Air Cob Series		Additional Information	
Input Watt	6	12	System lumens (Lm/W)	> 140
Product Code	LD-35-6W	LD-35-12W	CRI	> 80
Led /Chip	6	12	Input Voltage (AC)	90-320V
Led Rating Current (mA)	180	300	Power Factor	>0.5
Number Of Leds	1	1	Surge Protection	Upto 3 KV
View Angle	60*	60*	Driver Efficiency (%)	>85%
Color Temperature	3000K-6000K	3000K-6000K	Driver (Type)	Isolate CC
Lumens	600-660	1200-1320	Driver Location	External
Input Current	50 mA	86 mA	BIS (IS Number)	IS 15885(PART 2/SEC 13)
Calculated Input current (@ 240 V)	50	53	BIS (R Number)	R-85001180
Output Current	140 mA	280 mA	Led Life	> 50000 Hrs
Output Voltage	36V	36V	Operating Temperature	-10* to +50* C
IP (20/40/65)	IP40	IP40	Rated Voltage (AC)	240V
Shape	Round	Round	Frequency (Hz)	50Hz± 2
Dimensions (Length - mm)	ø80	ø90	Protection	Over Temperature, Short-circuit Protection, OC Protection, Reverse Polarity Protection
Dimensions (Width - mm)				
Dimensions (Height - mm)	70	80		
Dimensions (Cutout - mm)	ø70	ø80		
BIS Model No.	LDS 6-10	LSS 10-15		
Packing	12	12		

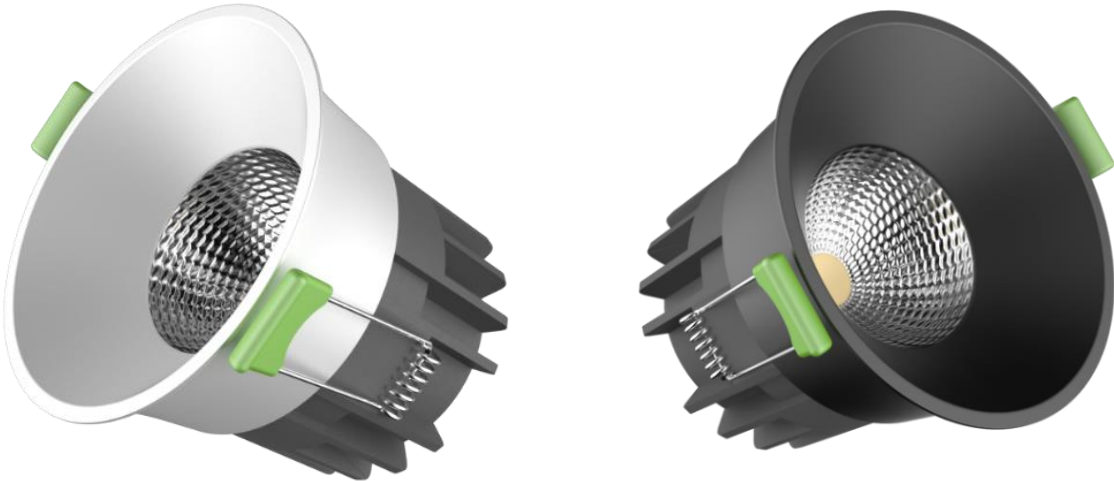

Ledure Air Cob Series is the new feather in the cap in the cob segment. This product provides the perfect solution for a COB product with deep focus. The product has anti glare properties which is soothing to the eye and give the environment ,the perfect ambience required . The trim less aluminum housing gives the product perfect architectural look and the beautifully designed fins make the products long lasting. The diamond cut reflectors gives the product halogen accent. The product is well suited for modern age Residences , Showrooms , Airport etc.