


Series	Slim Panel Series							Additional Information	
Shape	Square							System lumens (Lm/W)	> 140
Input Watt	3	6	9	12	15	18	22	CRI	> 80
Product Code	LD-021-3W	LD-021-6W	LD-021-9W	LD-021-12W	LD-021-15W	LD-021-18W	LD-021-22W	Input Voltage (AC)	90-320V
Led /Chip	0.2	0.2	0.2	0.2	0.2	0.2	0.2	Power Factor	>0.6
Led Rating Current (mA)	60	60	60	60	60	60	60	Surge Protection	Upto 3 KV
Number Of Leds	15	30	48	60	75	90	110	Driver Efficiency (%)	>72%
View Angle	120*	120*	120*	120*	120*	120*	120*	Driver (Type)	Isolate CC
Color Temperature	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	Driver Location	External
Lumens	300-315	600-630	900-945	1200-1260	1500-1575	1800-1890	2200-2310	IP (20/40/65)	IP40
Input Current	20 mA	50 mA	39 mA	52 mA	65 mA	78 mA	95 mA	BIS (IS Number)	IS 10322(PART 5/ SEC 2)
Calculated Input current (@ 240 V)	21	50	39	53	66	79	96	BIS (R Number)	R-93010650
Output Current	240 mA	270 mA	200mA	280 mA	280 mA	280 mA	290 mA	Led Life	> 50000 Hrs
Output Voltage	9 V	18 V	36 V	36 V	45 V	54 V	66 V	Operating Temperature	-10* to +50* C
Shape	Square	Square	Square	Square	Square	Square	Square	Rated Voltage (AC)	240V
Dimensions (Length - mm)	80	115	120	150	170	203	225	Frequency (Hz)	50Hz± 2
Dimensions (Width - mm)	80	115	120	150	170	203	225	Protection	Over Temperature, Short-circuit Protection, OC Protection, Reverse Polarity Protection
Dimensions (Height - mm)	22	22	22	22	22	22	22	Frequency (Hz)	50Hz± 2
Dimensions (Cutout - mm)	70*70	100*100	105*105	125*125	155*155	180*180	200*200	Protection	Over Temperature, Short-circuit Protection, OC Protection, Reverse Polarity Protection
BIS Model No.	LDL 3	LDL 6	LDL 9	LDL 12	LDL 15	LDL 18	LDL 22		
MRP(RS)	290	360	525	640	750	1050	1250		
Packing	40	40	20	20	20	10	10		

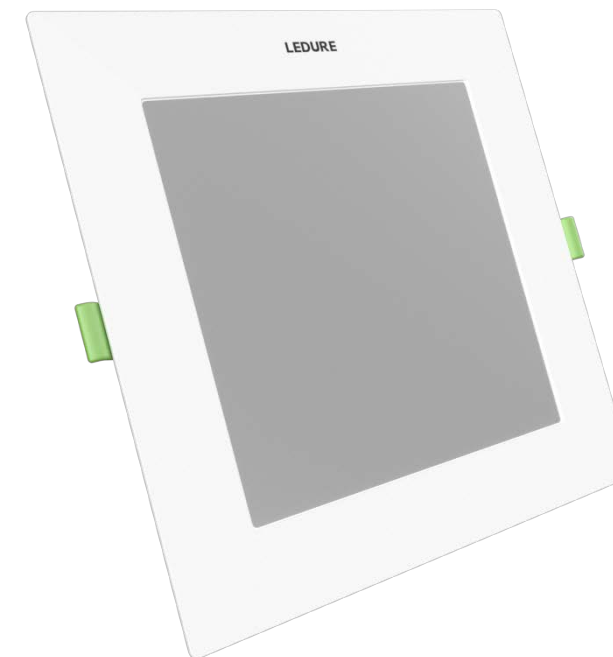

Ledure Slim Panel series is a veteran in the space of edge lit panel with a timeless classic design . Separate driver & housing gives it a long lasting easy to install & maintain feature that is loved by all customers. As the name suggest the Ledure Slim panel is slim enough to fit in any thickness of fall ceiling & the edge lit feature gives it an anti glare property that is soothing to the eye. The strong combination of aluminium die cast body & poly carbonate diffuser & LGP make the product long lasting . The product is built to sustain high voltage fluctuations . Its recommended for residential , showroom & other multipurpose uses . The product is a must buy for a customer looking for a timeless association & the better light distribution.