


Series	Ultra Slim Series					Additional Information	
Shape	Round					System lumens (Lm/W)	> 140
Wattage	6	9	12	15	18	CRI	> 80
Product Code	LD-352-6W	LD-352-9W	LD-352-12W	LD-351-15W	LD-352-18W	Input Voltage (AC)	90-320V
Led /Chip	0.2	0.2	0.2	0.2	0.2	Power Factor	>0.95
Led Rating Current (mA)	60	60	60	60	60	Surge Protection	Upto 3 KV
Number Of Leds	40	48	69	84	100	Driver Efficiency (%)	>87%
View Angle	120*	120*	120*	120*	120*	Driver (Type)	Non-Isolate CC
Color Temperature	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	Driver Location	Internal
Lumens	600-630	900-945	1200-1260	1500-1575	1800-1890	IP (20/40/65)	IP40
System lumens (Lm/W)	> 140	> 140	> 140	> 140	> 140	BIS (IS Number)	IS 10322(PART 5/ SEC 2)
CRI	> 80	> 80	> 80	> 80	> 80	BIS (R Number)	R-93010650
Input Voltage (AC)	90-320V	90-320V	90-320V	90-320V	90-320V	Led Life	> 50000 Hrs
Input Current	26 mA	39 mA	52 mA	65 mA	78 mA	Operating Temperature	-10* to +50* C
Calculated Input current (@ 240 V)	26	39	53	66	79	Rated Voltage (AC)	240V
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	Frequency (Hz)	50Hz± 2
Surge Protection	Upto 3 KV	Upto 3 KV	Upto 3 KV	Upto 3 KV	Upto 3 KV	Protection	Over Temperature, Short-circuit Protection, OC Protection, Reverse Polarity Protection
Output Current	95 mA	110 mA	150 mA	210 mA	210 mA	IP (20/40/65)	IP40
Output Voltage	60 V	72 V	69 V	63 V	75 V	BIS (IS Number)	IS 10322(PART 5/ SEC 2)
Driver Efficiency (%)	>87%	>88%	>88%	>88%	>88%	BIS (R Number)	R-93010650
Driver (Type)	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	Led Life	> 50000 Hrs
Driver Location	Internal	Internal	Internal	Internal	Internal	Operating Temperature	-10* to +50* C
Shape	Round	Round	Round	Round	Round	Rated Voltage (AC)	240V
Dimensions (Length - mm)	Ø110	Ø120	Ø150	Ø170	Ø203	Frequency (Hz)	50Hz± 2
Dimensions (Width - mm)							
Dimensions (Height - mm)	26	26	26	26	26		
Dimensions (Cutout - mm)	Ø95	Ø105	Ø125	Ø155	Ø185		
BIS Model No.	LDL 06	LDL 09	LDL 12	LDL 15	LDL 18		
MRP(RS)	340	435	540	640	900		
Packing	40	20	20	20	20		

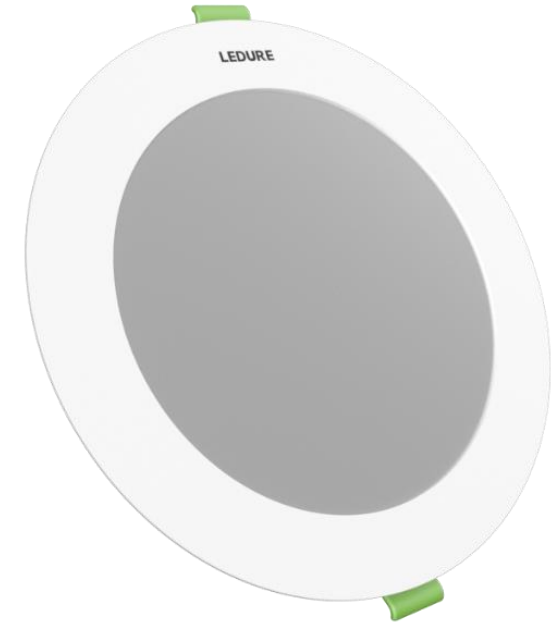

Ledure Ultra Slim panel are widely used because of its high power saving feature , modern aesthetic looks which suits new age interior designed ultra slim series is gaining grounds for its sleek looks , innovative feature as well as seamless design. The aluminum housing fits any thickness of fall ceiling and the edge lit feature gives as antiglare comfort to the eye. Its modern design give you better distributed illumination that lights up your home decor. The Ultra Slim panel is made up of a perfect combination of high pressure die cast aluminum housing and superior grade polycarbonate space LGP & diffuser which results in giving you a product which is strong on the outside & provides you the perfect light distribution. This product is must have for all residential & other multipurpose uses.