


Series	Ultra Slim Series					Additional Information	
Shape	Square					System lumens (Lm/W)	> 140
Wattage	6	9	12	15	18	CRI	> 80
Product Code	LD-351-6W	LD-351-9W	LD-351-12W	LD-351-15W	LD-351-18W	Input Voltage (AC)	90-320V
Led /Chip	0.2	0.2	0.2	0.2	0.2	Power Factor	>0.95
Led Rating Current (mA)	60	60	60	60	60	Surge Protection	Upto 3 KV
Number Of Leds	40	48	69	84	104	Driver Efficiency (%)	>87%
View Angle	120*	120*	120*	120*	120*	Driver (Type)	Non-Isolate CC
Color Temperature	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K	Driver Location	Internal
Lumens	600-630	900-945	1200-1260	1500-1575	1800-1890	IP (20/40/65)	IP40
System lumens (Lm/W)	> 140	> 140	> 140	> 140	> 140	BIS (IS Number)	IS 10322(PART 5/ SEC 2)
CRI	> 80	> 80	> 80	> 80	> 80	BIS (R Number)	R-93010650
Input Voltage (AC)	90-320V	90-320V	90-320V	90-320V	90-320V	Manufactured At	A-40, Sector-58, Noida, Gautam Buddha Nagar, Uttar Pradesh, 201301
Input Current	26 mA	39 mA	52 mA	65 mA	78 mA	Led Life	> 50000 Hrs
Calculated Input current (@ 240 V)	26	39	53	66	79	Operating Temperature	-10* to +50* C
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	Rated Voltage (AC)	240V
Surge Protection	Upto 3 KV	Upto 3 KV	Upto 3 KV	Upto 3 KV	Upto 3 KV	Frequency (Hz)	50Hz± 2
Output Current	95 mA	110 mA	150 mA	210 mA	210 mA	Protection	Over Temperature, Short-circuit Protection, OC Protection, Reverse Polarity Protection
Output Voltage	60 V	72 V	69 V	63 V	78 V	IP (20/40/65)	IP40
Driver Efficiency (%)	>87%	>88%	>88%	>88%	>88%	BIS (IS Number)	IS 10322(PART 5/ SEC 2)
Driver (Type)	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	Non-Isolate CC	BIS (R Number)	R-93010650
Driver Location	Internal	Internal	Internal	Internal	Internal	Led Life	> 50000 Hrs
Shape	Square	Square	Square	Square	Square	Operating Temperature	-10* to +50* C
Dimensions (Length - mm)	115	120	150	170	203	Rated Voltage (AC)	240V
Dimensions (Width - mm)	115	120	150	170	203	Frequency (Hz)	50Hz± 2
Dimensions (Height - mm)	26	26	26	26	26		
Dimensions (Cutout - mm)	100*100	105*105	125*125	155*155	182*182		
BIS Model No.	LDL 06	LDL 09	LDL 12	LDL 15	LDL 18		

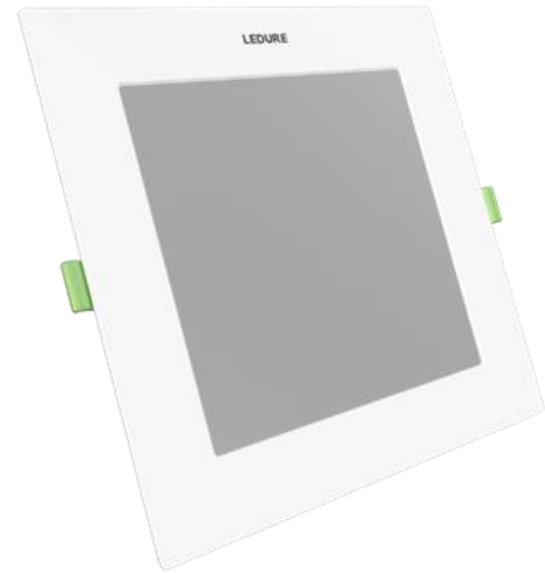

Ledure Ultra Slim panel are widely used because of its high power saving feature , modern aesthetic looks which suits new age interior designed ultra slim series is gaining grounds for its sleek looks , innovative feature as well as seamless design.

The aluminum housing fits any thickness of fall ceiling and the edge lit feature gives as antiglare comfort to the eye. Its modern design give you better distributed illumination that lights up your home decor.

The Ultra Slim panel is made up of a perfect combination of high pressure die cast aluminum housing and superior grade polycarbonate space LGP & diffuser which results in giving you a product which is strong on the outside & provides you the perfect light distribution.

This product is must have for all residential & other multipurpose uses.